



# Dura-Cyl




The Dura-Cyl provides the longest holding time, lowest evaporation rate, highest gas-withdrawal rate and best life-cycle cost.

- ❖ Ideal for liquid nitrogen, oxygen, argon, CO<sub>2</sub> or nitrous oxide
- ❖ Different sizes and pressures to better meet your needs
- ❖ Stainless-steel construction, inside and out
- ❖ Thicker, dent-resistant outer shell
- ❖ Patented, durable, inner-vessel support system
- ❖ Heavy-duty footing and large diameter handling ring with four supports
- ❖ Combination Pressure Control Regulator
- ❖ Roto-Cal™ Liquid Level Gauge System

## LCCM Models


- ❖ Integral mounted dual regulator that controls pressure building and economizer function
- ❖ Eliminates copper piping and fittings
- ❖ Easy to dial knob

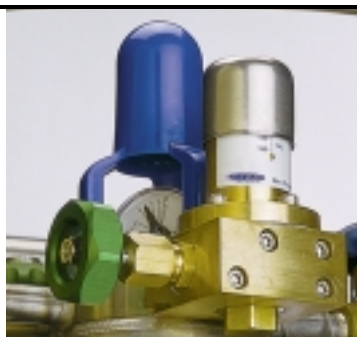

The Roto-Cal™ gauge features an easy-to-read dial liquid level indicator with swivel head design.

## MCR Models

- ❖ Combination pressure control regulator
- ❖ Calibrated micrometer adjusting screw



# Dura-Cyl

## Specifications

MODEL	Size	160	160	180	180	200	200	230	230	265	265
	Pressure	MP	HP	MP	HP	MP	HP	MP	HP	MP	HP
LCCM	Part Number	10508748	10508756	10508764	10496433	10508772	10496417	10496468	10496492	10510039	10512561
MCR	Part Number	10783424	10783467	10783491	10783539	10783598	10783619	10783635	10783651	10783678	10783694
<b>CAPACITY</b>											
Liquid (Gross)	(liters)	176	176	196	196	209	209	240	240	276	276
Liquid (Net)	(liters)	165	165	185	185	196	196	230	230	265	265
Gas (N)*	ft <sup>3</sup> / Nm <sup>3</sup>	3685 / 97	3464 / 91	4099 / 108	3864 / 102	4375 / 115	4072 / 108	5024 / 132	4734 / 124	5769 / 152	5438 / 143
Gas (O <sub>2</sub> )*	ft <sup>3</sup> / Nm <sup>3</sup>	4577 / 120	4348 / 114	5096 / 134	4843 / 127	5435 / 143	5048 / 133	6244 / 164	5930 / 156	7186 / 189	6811 / 179
Gas (Ar)*	ft <sup>3</sup> / Nm <sup>3</sup>	4448 / 117	4226 / 111	4961 / 130	4709 / 124	5290 / 139	4932 / 130	6073 / 160	5763 / 151	6982 / 183	6634 / 174
Gas (CO <sub>2</sub> )*	ft <sup>3</sup> / Nm <sup>3</sup>	--	3382 / 89	--	3766 / 99	--	4011 / 105	--	4614 / 121	--	5305 / 139
Gas (N <sub>2</sub> O)*	ft <sup>3</sup> / Nm <sup>3</sup>	--	3207 / 84	--	3574 / 94	--	3810 / 100	--	4378 / 115	--	5034 / 132
<b>PERFORMANCE</b>											
NER (N <sub>2</sub> )	% per day	2	2	1.9	1.9	1.85	1.85	1.8	1.8	2	2
NER (O <sub>2</sub> - Ar)	% per day	1.4	1.4	1.3	1.3	1.2	1.2	1.2	1.2	1.4	1.4
NER (CO <sub>2</sub> - N <sub>2</sub> O)	% per day	--	0.5	--	0.5	--	0.5	--	0.5	--	0.5
Gas Flow (N <sub>2</sub> , O <sub>2</sub> , Ar)	ft <sup>3</sup> /hr / Nm <sup>3</sup> /hr	350 / 9.2	350 / 9.2	350 / 9.2	350 / 9.2	400 / 10.5	400 / 10.5	400 / 10.5	400 / 10.5	400 / 10.5	400 / 10.5
Gas Flow (CO <sub>2</sub> , N <sub>2</sub> O)	ft <sup>3</sup> /hr / Nm <sup>3</sup> /hr	--	110 / 2.9	--	110 / 2.9	--	110 / 2.9	--	110 / 2.9	--	110 / 2.9
<b>DIMENSIONS &amp; PRESSURE RATINGS</b>											
Relief Valve Setting	psig/bar	230 / 16	350 / 24	230 / 16	350 / 24	230 / 16	350 / 24	230 / 16	350 / 24	230 / 16	350 / 24
DOT/CTC Rating		4L200	4L292	4L200	4L292	4L200	4L292	4L200	4L292	4L200	4L292
Diameter	in / cm	20/50.8	20/50.8	20/50.8	20/50.8	20/50.8	20/50.8	26/66.0	26/66.0	26/66.0	26/66.0
Height	in / cm	59.6 / 151.3	59.6 / 151.3	63.5 / 161.3	63.5 / 161.3	65.8 / 167.1	65.8 / 167.1	52.9 / 131.9	52.9 / 131.9	57.8 / 146.8	57.8 / 146.8
Empty Weight	lb / kg	250 / 113.4	280 / 126.9	260 / 117.9	300 / 136.1	280 / 126.9	320 / 145.1	300 / 136.1	340 / 154.2	340 / 154.2	360 / 163.6
Full Weight (N <sub>2</sub> )	lb / kg	517 / 234	531 / 241	557 / 253	580 / 263	597 / 271	618 / 280	664 / 301	683 / 310	758 / 344	754 / 343
(O <sub>2</sub> )	lb / kg	629 / 285	640 / 290	682 / 309	701 / 318	730 / 331	747 / 339	817 / 370	831 / 377	935 / 424	924 / 420
(Ar)	lb / kg	710 / 322	717 / 325	773 / 351	787 / 357	827 / 375	839 / 380	928 / 421	936 / 424	1062 / 481	1046 / 475
(CO <sub>2</sub> )	lb / kg	--	667 / 303	--	731 / 331	--	779 / 353	--	868 / 393	--	967 / 439
(N <sub>2</sub> O)	lb / kg	--	647 / 293	--	709 / 321	--	756 / 343	--	841 / 381	--	936 / 425

\* At relief valve settings

## Nomenclature

1. Gas Use Valve - For gas withdrawal.
2. Fill / Liquid Valve - For filling or liquid withdrawal operations.
3. Pressure Control Valve - To isolate (on/off) the pressure control regulator.
4. Vent Valve - To vent pressure.
5. Combination Pressure Control Regulator - To automatically control operating pressure.
6. Pressure Gauge - Indicates cylinder pressure
7. & 8. Relief Valves, Rupture Disk
9. Liquid Level Gauge - To approximate the liquid contents of the liquid cylinder

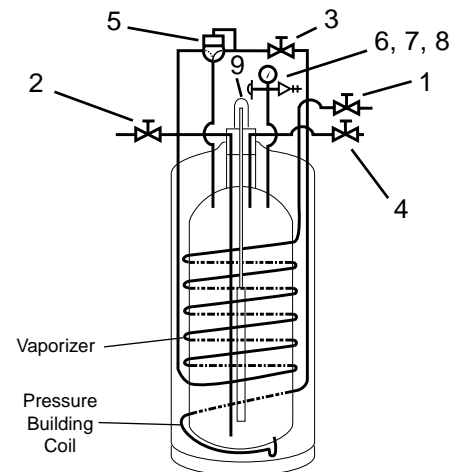


Chart Industries Inc., Storage Systems Division, 3505 County Road 42 West, Burnsville, MN 55306-3803  
 Web: www.chart-ind.com; E-mail: storagesystems@chart-ind.com  
 US: 800-400-4683, FAX: 800-232-9683; Worldwide: 952-882-5090; FAX: 952-882-5008  
 Chart Europe GmbH: +49 (0)212-700 570, FAX: +49 (0)212-700 577; Chart Asia Inc.: 65-838-5209, FAX: 65-235-3680